

ALUMINUM ALLOY LEVELS





LIFETIME WARRANTY
VIALS

4911-600A

bottom surface (non-magnetic, milled)

- Top and bottom working surfaces
- Shock-proof and UV-proof vials
- Die casting aluminum alloy frame
- Zero position of horizontal vial can be set
- One graduation of horizontal vial is 2% slope
- Working temperature: -15°C~55°C

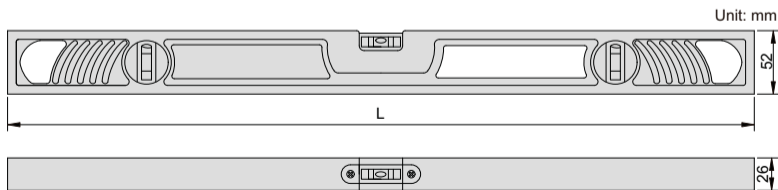

Code	Length (L)	Accuracy
4911-600A	600mm	0.5mm/m (.006in/ft)
4911-800A	800mm	0.5mm/m (.006in/ft)