



CONCENTRICITY GAGE

to ensure the accuracy $8\mu\text{m}$,
the distance between measuring
point and roller should be $<50\text{mm}$



4786-1

- Accuracy: $8\mu\text{m}$
- Optional accessory: dial test indicator

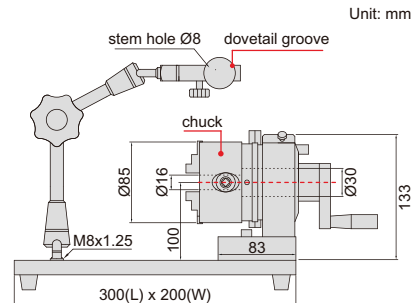

for cylinder



for tube



Code	Applicable inside diameter	Applicable outside diameter
4786-1	$\varnothing 24\text{-}64\text{mm}$	$\varnothing 2\text{-}70\text{mm}$