



# CONCENTRICITY GAGES

QUICK-POSITIONING, SUITABLE  
FOR MASS MEASUREMENT




4726-1




4726-2


dial test indicator is optional

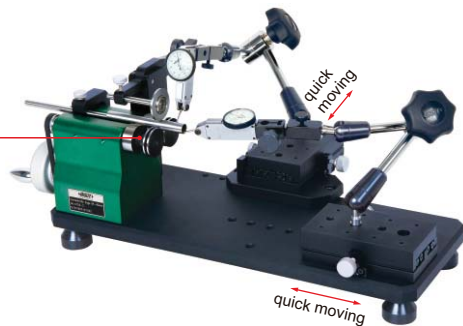

4726-2

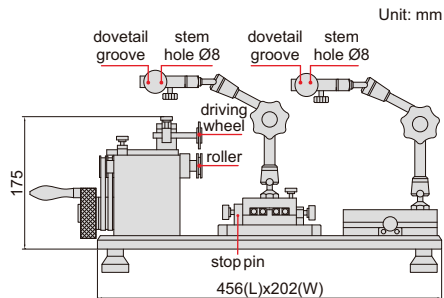

to ensure the accuracy 2 $\mu$ m,  
the distance between measuring  
point and roller should be <30mm



- With ball bearing, high stability, long working life
- Accuracy: 2 $\mu$ m
- Optional accessory: dial test indicator

Code	Applicable diameter
4726-1	Ø3-40mm
4726-2	Ø2-40mm