

CROSS-LINE LASER LEVEL CODE 4917-30



IP54
WATERPROOF


AUDIBLE AND VISUAL
WARNING WHEN OUT OF $\pm 3^\circ$

- Red horizontal and vertical cross laser lines
- Self-leveling within $\pm 3^\circ$, self-leveling time within 4s, audible and visual warning when out of $\pm 3^\circ$
- Folding legs for angle and height adjustment
- Outdoor use with the detector (code: **4917-DETECTOR**)

application examples



folding legs for angle
and height adjustment

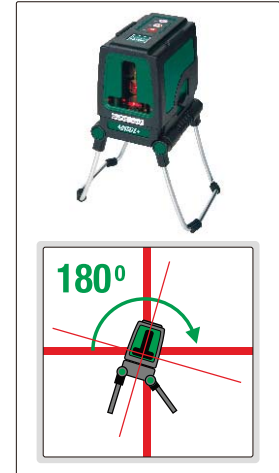

SPECIFICATION

| | |
|-----------------------|---|
| Laser line width | 2 \pm 0.5mm (within 5m) |
| Laser type | 630–660nm, class II, <1mW |
| Beam angle | 120 \pm 0.5° |
| Self-leveling range | $\pm 3^\circ$ |
| Working distance | indoor: 30m, outdoor: 50m with detector (optional) |
| Accuracy | 0.2mm/m |
| Operation temperature | -10~40°C |
| Power supply | 3 \times AA batteries, for 3 hours working |
| Dimension | 100 \times 82 \times 104mm |
| Weight | 620g |

STANDARD DELIVERY

| | |
|-----------------------------|-------|
| Main unit | 1 pc |
| 1/4" to 5/8" tripod adaptor | 1 pc |
| Battery (AA) | 3 pcs |

OPTIONAL ACCESSORY

| | |
|------------------|----------------------|
| Outdoor detector | 4917-DETECTOR |
|------------------|----------------------|

OUTDOOR DETECTOR (OPTIONAL)

| | |
|----------------------|---|
| Detecting distance | horizontal 1~50m, vertical 1~30m |
| Detecting accuracy * | high accuracy ± 1.5 mm, low accuracy ± 2.5 mm |
| Power supply | 9V battery |
| Dimension | 168 \times 58 \times 30mm |
| Weight | 140g (battery included) |

* Use high accuracy detection mode within 15m,
use low accuracy detection mode over 15m



outdoor detector (**optional**)



stand
(included with outdoor detector)