



3-WIRES



7382-19

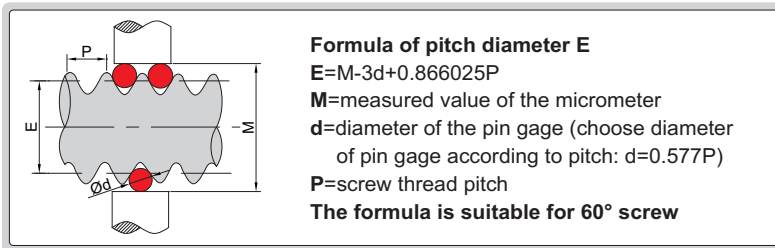

- Used with standard outside micrometers with spindle $\varnothing 6.35\text{mm}$ or $\varnothing 6.50\text{mm}$ to measure pitch diameter of screw threads
- Diameter accuracy: $\pm 0.5\mu\text{m}$
- Cylindricity: $1\mu\text{m}$
- Hardness: HRC60
- Supplied with manufacturer calibration certificate

For outside micrometers with spindle $\varnothing 6.35\text{mm}$ ($\varnothing D$)

Code	Pin gage diameter ($\varnothing d$)
7382-11	0.170mm
7382-12	0.195mm
7382-13	0.220mm
7382-14	0.250mm
7382-15	0.290mm
7382-16	0.335mm
7382-17	0.390mm
7382-18	0.455mm
7382-19	0.530mm
7382-110	0.620mm
7382-111	0.725mm
7382-112	0.895mm
7382-113	1.100mm
7382-114	1.350mm
7382-115	1.650mm
7382-116	2.050mm
7382-117	2.550mm
7382-118	3.200mm
7382-1S	18 pairs/set, including all above 3-wires

For outside micrometers with spindle $\varnothing 6.50\text{mm}$ ($\varnothing D$)

Code	Pin gage diameter ($\varnothing d$)
7382-21	0.170mm
7382-22	0.195mm
7382-23	0.220mm
7382-24	0.250mm
7382-25	0.290mm
7382-26	0.335mm
7382-27	0.390mm
7382-28	0.455mm
7382-29	0.530mm
7382-210	0.620mm
7382-211	0.725mm
7382-212	0.895mm
7382-213	1.100mm
7382-214	1.350mm
7382-215	1.650mm
7382-216	2.050mm
7382-217	2.550mm
7382-218	3.200mm
7382-2S	18 pairs/set, including all above 3-wires