
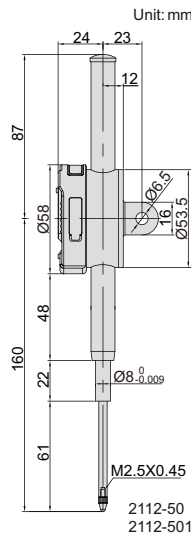
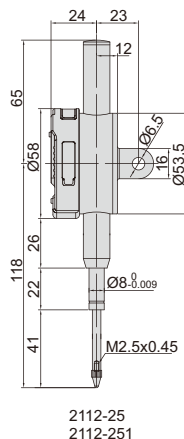


spindle lift knob is included



A digital depth gauge with a green circular display showing 0.355 mm. The gauge has a black handle and a stainless steel rule. The display is labeled "INOX" and "0.01mm".

- Button function: on/off, inch/mm, zero
- CR2032 battery, automatic power off
- Data output
- Optional accessory: data output cable (code **7306-40**, **7302-SPC3A**, **7305-SPC1A**), backs (page 104~105), contact points (page 102~103)

Code	Range	Accuracy	Hysteresis	Remark
2112-101F *	12.7mm/0.5"	5µm	2µm	flat back
2112-251F *	25.4mm/1"	5µm	3µm	flat back
2112-501F *	50.8mm/2"	6µm	3µm	flat back
2112-101 *	12.7mm/0.5"	5µm	2µm	lug back
2112-251 *	25.4mm/1"	5µm	3µm	lug back
2112-501 *	50.8mm/2"	6µm	3µm	lug back

Code	Range	Accuracy	Hysteresis	Remark
2112-10F *	12.7mm/0.5"	20μm	10μm	flat back
2112-25F *	25.4mm/1"	20μm	10μm	flat back
2112-50F *	50.8mm/2"	30μm	10μm	flat back
2112-10* *	12.7mm/0.5"	20μm	10μm	lug back
2112-25* *	25.4mm/1"	20μm	10μm	lug back
2112-50* *	50.8mm/2"	30μm	10μm	lug back

* Supplied with manufacturer inspection certificate traceable to NIST USA