



**INSPECTION
CERTIFICATE**




ELECTRONIC LEVEL CODE ISE-L050

DATA
OUTPUT


SHOCK
PROOF

software (optional)




measure flatness of surface plates

■ Shockproof

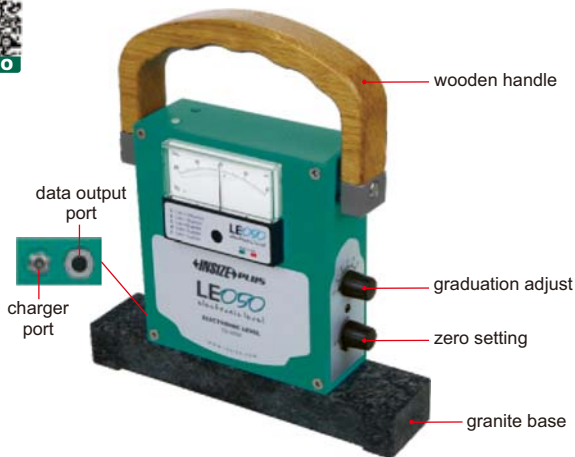

Unit: mm



SPECIFICATION

Graduation (adjustable)	250µm/m(=0.014°)	50µm/m(=10")	10µm/m(=2")	5µm/m(=1")	1µm/m(=0.2")
Range	5000µm/m	1000µm/m	200µm/m	100µm/m	20µm/m
Accuracy	±2%				
Range of zero setting	±1500µm/m				
Response time	<3 sec				
Data output	RS232				
Power supply	rechargeable battery, for 100 hours working				
Dimension	220x236x50mm				
Weight	2.8kg				

STANDARD DELIVERY

Main unit	1pc
AC/DC adapter	1pc

OPTIONAL ACCESSORY

USB Cable and software	ISE-L050-SOFTWARE
------------------------	-------------------