


Code	Range
741-036-11	0-36(8.250-0.127mm/.3249-.0050")

NO.	W
0	8.250mm(.3249")
1	7.350mm(.2893")
2	6.540mm(.2576")
3	5.830mm(.2294")
4	5.190mm(.2043")
5	4.620mm(.1819")
6	4.110mm(.1620")
7	3.670mm(.1443")
8	3.260mm(.1285")
9	2.910mm(.1144")
10	2.590mm(.1019")
11	2.300mm(.0907")
12	2.050mm(.0808")
13	1.820mm(.0720")
14	1.630mm(.0641")
15	1.450mm(.0571")
16	1.290mm(.0508")
17	1.150mm(.0453")
18	1.020mm(.0403")

NO.	W
19	0.912mm(.0359")
20	0.813mm(.0320")
21	0.724mm(.0285")
22	0.643mm(.0253")
23	0.574mm(.0226")
24	0.511mm(.0201")
25	0.440mm(.0179")
26	0.404mm(.0159")
27	0.361mm(.0142")
28	0.320mm(.0126")
29	0.287mm(.0113")
30	0.254mm(.0100")
31	0.226mm(.0089")
32	0.203mm(.0080")
33	0.180mm(.0071")
34	0.160mm(.0063")
35	0.142mm(.0056")
36	0.127mm(.0050")

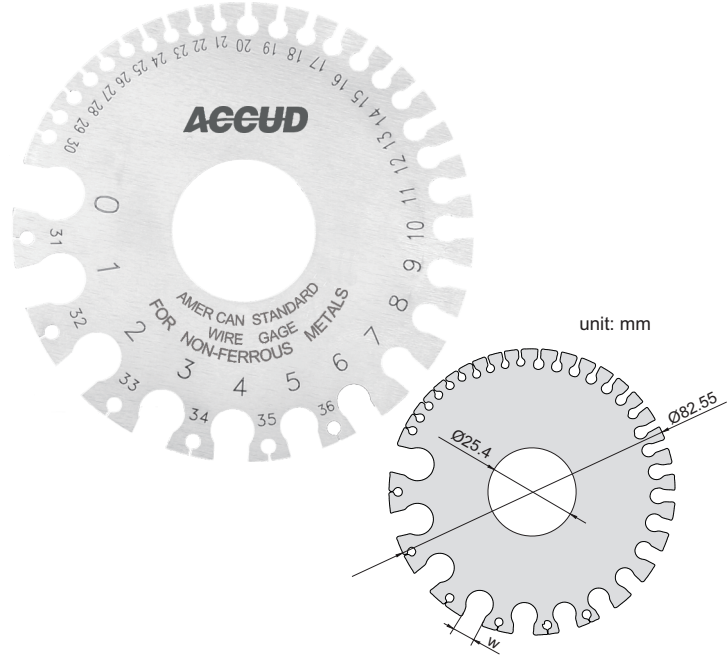

- ◆ For gaging non-ferrous wire and metals such as copper, brass and aluminum
- ◆ Hardened