

489

DIGITAL SURFACE PROFILE GAUGE




Data output



CR2032

- ◆ Measure peak-to-valley height of blast cleaned surface.
If the profile is too low, the adhesion of the coating to the surface will be reduced.
- If the profile is too high, it is dangerous that the profile peaks will remain non-coating, rust spots maybe occur.
- ◆ Meet ASTM D4417-B
- ◆ Zero set block is included, set zero before measurement
- ◆ Buttons: tolerance Go and No-Go display, data preset, measuring direction change, max./min./TIR measurement, inch/metric conversion, ABS/INC measurement
- ◆ Automatically power off (time is adjustable)
- ◆ Data output (cable code: 200-03 or 200-04)
- ◆ Stainless steel base

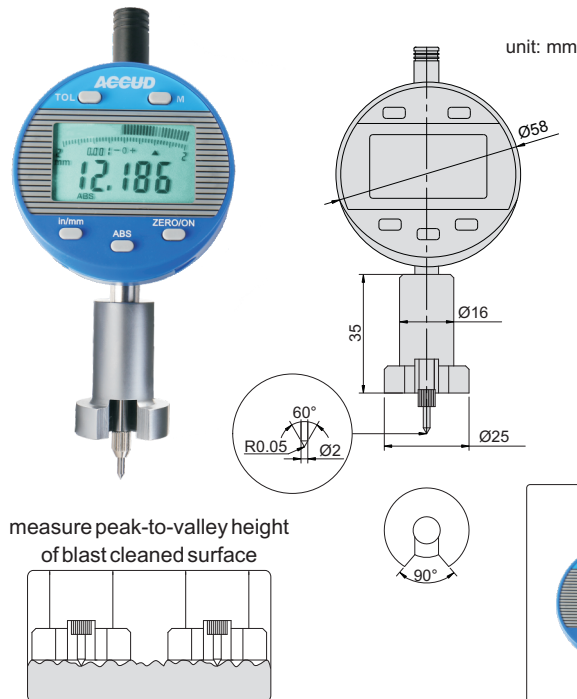

Set zero



Code	Range	Digital indicator stroke	Digital indicator resolution	Accuracy
489-010-01	0-12.7mm/0-0.5"	12.7mm/0.5"	0.001mm/0.00005"	±0.005mm

Accud



Row