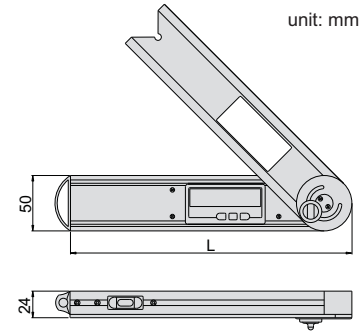
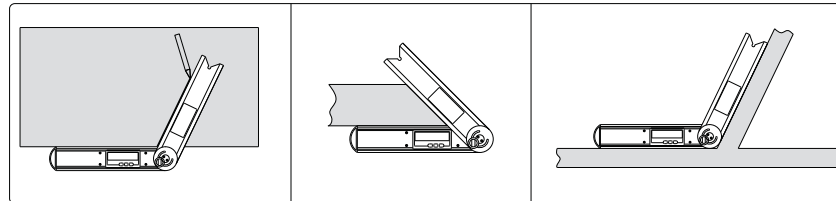


726**DIGITAL PROTRACTOR**

- ◆ Buttons: ON/OFF, HOLD, ZERO, ABS
- ◆ Measuring ranges can be set $0^{\circ}\sim 225^{\circ}$, $-225^{\circ}\sim 0^{\circ}$, $-45^{\circ}\sim 180^{\circ}$, $-180^{\circ}\sim -45^{\circ}$
- ◆ Remove the locking screw for 360° range
- ◆ With level vial
- ◆ Automatic power off

**Application**

Code	Range	Resolution	Accuracy	Size(L)
726-360-01	0-360°	0.05°	±0.15°	250mm