

## SERIES 216


## DIGITAL INDICATOR




- ◆ Reading in digital and analog
- ◆ Display can be rotated by 320°
- ◆ Button : on/off, zero, tolerance Go and No-Go display, data preset, measuring direction change, max./min./TIR, absolute/incremental measurement, mm/inch, data output
- ◆ Keep preset data and tolerance data in memory after restart
- ◆ Automatic power off
- ◆ Data output (cable code: 200-01 or 200-02)
- ◆ Supplied with lug and flat back




216-010-01

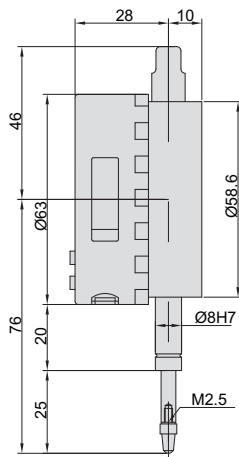

Range: 0-12.7mm

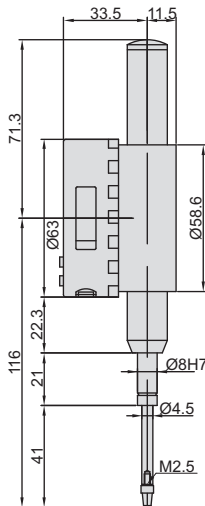

Range: 0-25.4mm

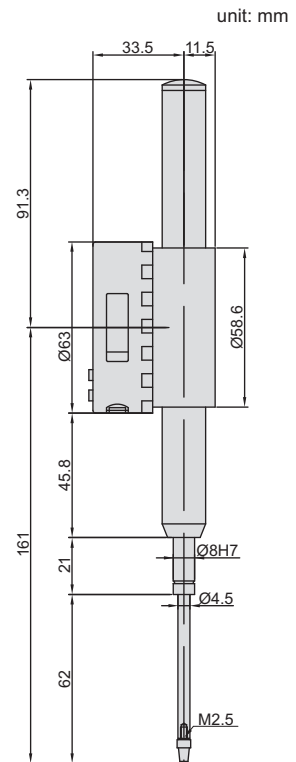

Range: 0-50.8mm

unit: mm

Resolution 0.001mm/0.00005"

Code	Range	Accuracy	Hysteresis
216-010-01	12.7mm/0.5"	5µm	2µm
216-025-01	25.4mm/1"	5µm	3µm
216-050-01	50.8mm/2"	6µm	3µm

Resolution 0.002mm/0.0005"

Code	Range	Accuracy	Hysteresis
216-010-11	12.7mm/0.5"	20µm	10µm
216-025-11	25.4mm/1"	20µm	10µm
216-050-11	50.8mm/2"	30µm	10µm

Contact points (optional)



Application

