



- ◆ With analog reading
- ◆ Supplied with cable for communication
- ◆ Button: data output, on/off, zero, inch/mm conversion, measuring direction set, data preset absolute/incremental measurement, max./min./range measurement, tolerance set, hold
- ◆ IP54 protection level
- ◆ Automatic power off
- ◆ Power: rechargeable battery, for 30 hours continuous working(full charge)



**217-015-01**

Contact points (optional)



Series 270


Included




Application



display can be rotated by 270°

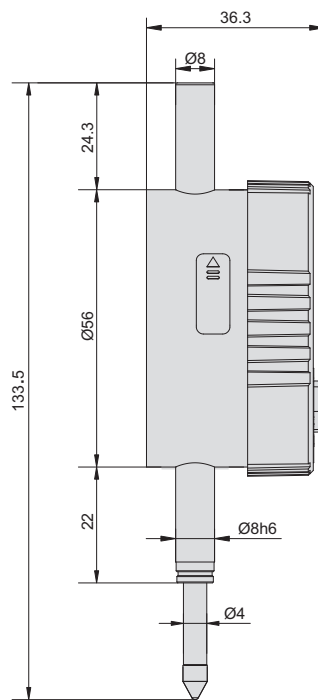

**217-015-01**

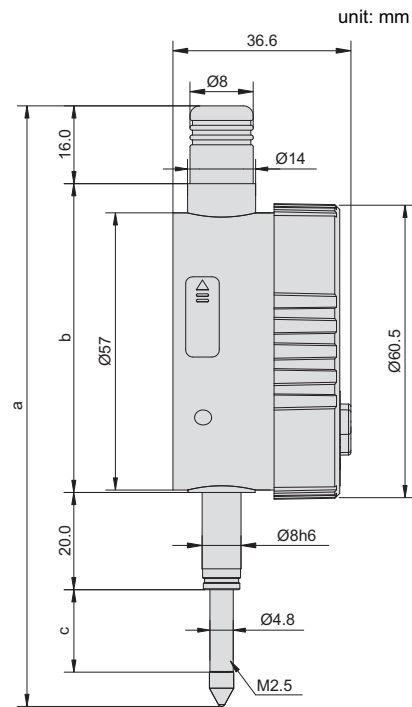

**217-010-01, 217-025-01 and 217-050-01**

unit: mm

Code	Range	Resolution	Accuracy	Hysteresis	Styli
217-015-01	15mm/0.6"	0.0005mm/0.00002"	2µm	1.5µm	Carbide

Code	Range	Resolution	Accuracy	Hysteresis	Styli	a	b	c
217-010-01	12.7mm/0.5"	0.0005mm/ 0.00002"	2µm	1.5µm	Carbide	118.7	61	14.7
217-025-01	25.4mm/1"		2µm	1.5µm	Carbide	151.7	81	27.7
217-050-01	50.8mm/2"		2µm	1.5µm	Carbide	222.2	126	53.2