



- ◆ Shock proof
- ◆ Supplied with lug and flat back

Styli (optional)




Application



232-001-11

unit: mm

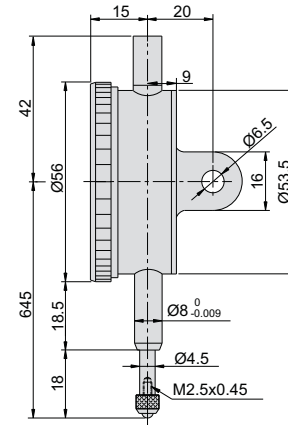

INDICATOR

Code	Range	Graduation	Accuracy	Hysteresis	Dial reading
232-0005-11	0.5mm	0.01mm	9μm	3μm	25-0-25
232-001-11	1mm	0.01mm	9μm	3μm	50-0-50