


SERIES 369

QUICK FEEDING OUTSIDE MICROMETER

- ◆ Graduation .0005"
- ◆ .05" feeding of each turn
- ◆ Friction thimble
- ◆ Carbide measuring faces
- ◆ Supplied with setting standards (except 0-1")



369-001-E01

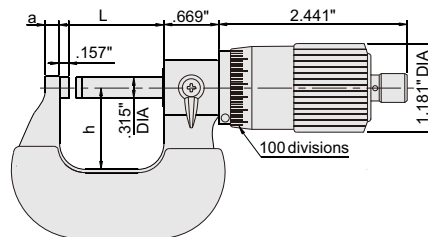

Setting standards (included)



| Code | Range | Accuracy | a | h | L | Setting standards (included) |
|-------------|-------|----------|-------|--------|--------|------------------------------|
| 369-001-E01 | 0-1" | .00015" | .236" | .945" | 1.260" | - |
| 369-002-E01 | 1-2" | .00015" | .315" | 1.260" | 2.244" | 1" |
| 369-003-E01 | 2-3" | .00020" | .315" | 1.772" | 3.228" | 2" |
| 369-004-E01 | 3-4" | .00020" | .315" | 2.244" | 4.213" | 3" |
| 369-005-E01 | 4-5" | .00025" | .315" | 2.756" | 5.236" | 4" |
| 369-006-E01 | 5-6" | .00025" | .315" | 3.228" | 6.220" | 5" |
| 369-007-E01 | 6-7" | .00030" | .315" | 3.740" | 7.205" | 6" |
| 369-008-E01 | 7-8" | .00030" | .315" | 4.213" | 8.228" | 7" |