
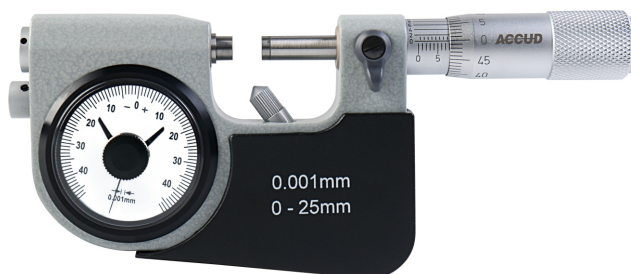
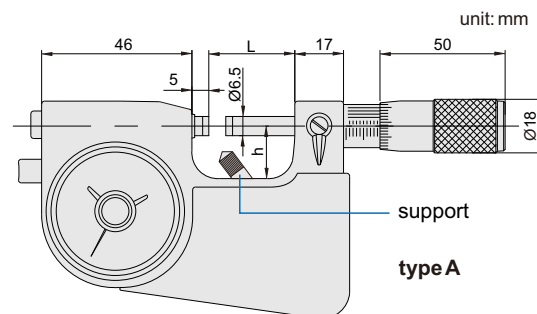


- ◆ Dial indicator: range 40μm, graduation 0.001mm, accuracy 0.001mm
- ◆ Carbide measuring faces
- ◆ Supplied with setting standards (except 0-25mm)


349-001-01

349-001-02

Setting standards(included)

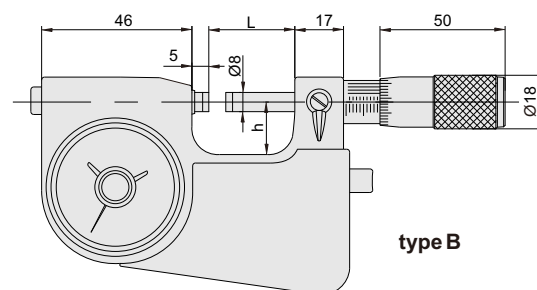

Code	Micrometer head range	Micrometer head graduation	Micrometer head accuracy	Type	L	h	Setting standards (included)	Support
349-001-01	0-25mm	0.002mm	4μm	A	28.5	19	-	with
349-002-01	25-50mm	0.002mm	4μm	A	53.5	30	25mm	with
349-003-01	50-75mm	0.002mm	5μm	A	78.5	45	50mm	without
349-004-01	75-100mm	0.002mm	5μm	A	103.5	57	75mm	without
349-005-01	100-125mm	0.002mm	5μm	A	128.5	69	100mm	without
349-006-01	125-150mm	0.002mm	5μm	A	153.5	82	125mm	without
349-007-01	150-175mm	0.002mm	5μm	A	178.5	94	150mm	without
349-008-01	175-200mm	0.002mm	5μm	A	202.5	106	175mm	without
349-001-02	0-25mm	0.002mm	4μm	B	28.5	19	-	without

* **NEW**

* **NEW**

