

SERIES 303

QUICK FEEDING DIGITAL OUTSIDE MICROMETER




ACEUD



303-001-21



- ◆ 2mm feeding of each turn
- ◆ IP65 dust/waterproof
- ◆ Automatic power off
- ◆ Button function: on/off, set, mm/inch, data transmission
- ◆ Carbide measuring faces, friction thimble
- ◆ Supplied with spherical anvil
- ◆ Supplied with setting standards (except 0-25mm/0-1")
- ◆ Data output

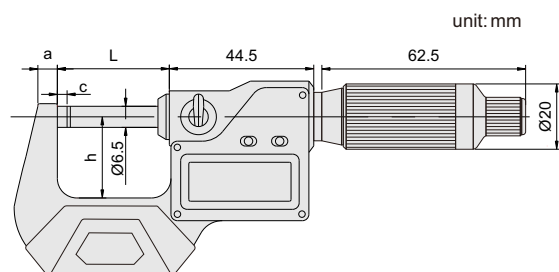

Setting standards (included)



Data output interface

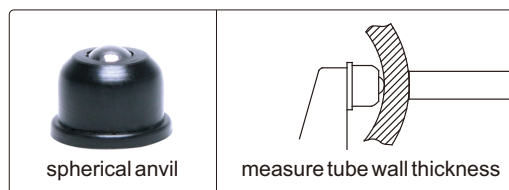

MICROMETER

Code	Range	Resolution	Accuracy	a	c	h	L	Setting standards(included)
303-001-21 *	0-25mm/0-1"	0.001mm/0.00005"	±2μm	6	3	25	34.5	-
303-002-21 *	25-50mm/1-2"	0.001mm/0.00005"	±2μm	8	3	32	59.5	25mm
303-003-21 *	50-75mm/2-3"	0.001mm/0.00005"	±3μm	8	3	44.5	84.5	50mm
303-004-21 *	75-100mm/3-4"	0.001mm/0.00005"	±3μm	8	3	57	109.5	75mm
303-005-21	100-125mm/4-5"	0.001mm/0.00005"	±3μm	10	3	70	135	100mm
303-006-21	125-150mm/5-6"	0.001mm/0.00005"	±3μm	10	3	82	160.5	125mm
303-007-21	150-175mm/6-7"	0.001mm/0.00005"	±4μm	12	5.5	94.5	186	150mm
303-008-21	175-200mm/7-8"	0.001mm/0.00005"	±4μm	12	5.5	107	211.5	175mm
303-009-21	200-225mm/8-9"	0.001mm/0.00005"	±4μm	23	5.5	129.5	236	200mm
303-010-21	225-250mm/9-10"	0.001mm/0.00005"	±4μm	23	5.5	142.5	261.5	225mm
303-011-21	250-275mm/10-11"	0.001mm/0.00005"	±5μm	23	5.5	155	287	250mm
303-012-21	275-300mm/11-12"	0.001mm/0.00005"	±5μm	23	5.5	167.5	312.5	275mm

* With manufacturer inspection certificate