

# DIGITAL OUTSIDE MICROMETERS (WITHOUT DATA OUTPUT)

- Resolution 0.001mm/0.00005"
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, ABS/INC
- No data output
- LR44 battery, automatic power off
- Carbide measuring faces
- Supplied with spherical anvil
- Setting standards are included (except 0-25mm/0-1")

**INSPECTION  
CERTIFICATE**  
TRACEABLE TO DKD



without data output



**3108-25A**

**ATTENTION: NO  
DATA OUTPUT**

**IP65  
WATERPROOF**



ratchet stop




friction thimble for  
one hand operation




## Ratchet stop type

Code	Range	Accuracy	L	a	b	c	(mm)
<b>3108-25A*</b>	0-25mm/0-1"	±2μm	34.5	6	25	3	
<b>3108-50A*</b>	25-50mm/1-2"	±2μm	59.5	8	32	3	
<b>3108-75A*</b>	50-75mm/2-3"	±3μm	84.5	8	44.5	3	
<b>3108-100A*</b>	75-100mm/3-4"	±3μm	109.5	8	57	3	
<b>3108-125A</b>	100-125mm/4-5"	±3μm	135	10	70	3	
<b>3108-150A</b>	125-150mm/5-6"	±3μm	160.5	10	82	3	
<b>3108-175A</b>	150-175mm/6-7"	±4μm	186	12	94.5	5.5	
<b>3108-200A</b>	175-200mm/7-8"	±4μm	211.5	12	107	5.5	



spherical anvil  
(included)

measure tube  
wall thickness

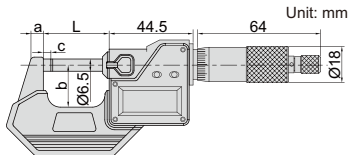

Unit: mm

## Friction thimble type

Code	Range	Accuracy	L	a	b	c	(mm)
<b>3108-25FA*</b>	0-25mm/0-1"	±2μm	34.5	6	25	3	

\* Supplied with manufacturer inspection certificate traceable to DKD Germany